

# SURFboard® SB5100 Cable Modem



Motorola's next generation SURFboard® SB5100 Cable Modem incorporates the latest DOCSIS® 2.0 Advanced Time Division Multiple Access (A-TDMA) and Synchronous Code Division Multiple Access (S-CDMA) technologies to provide up to three times greater upstream capacity than DOCSIS 1.0/1.1 systems.

Packed with power, the SB5100 is interoperable and backward compatible with DOCSIS 1.0 and 1.1 for a fast and timely transition — operators can deploy the SB5100 today without a service interruption. The Motorola SURFboard SB5100 is flexible and allows operators to simultaneously maximize their current infrastructure investments and offer additional cost-effective services.


Convenient for operators and end-users alike, the Motorola SURFboard SB5100 ensures end-user security via a top-mounted stand-by button that quickly isolates the USB and Ethernet connection to the PC without disconnecting the cable modem from the RF network. What's more, the SB5100 simplifies troubleshooting with its front panel status indicator LEDs and integrated HTML diagnostics page. The Motorola SURFboard SB5100 is competitively priced and includes many of the valuable features found in previous SURFboard models, such as USB and Ethernet connectivity, software upgrades available over the network, proven field reliability and quality, advanced RF design and a high-performance processor.

Highly functional and attractive, the SB5100 features a new, compact design that is a stylish and clutter-free addition to virtually any desktop.

*Take advantage of DOCSIS® 2.0 technology today with Motorola's next-generation SURFboard® SB5100 Cable Modem.*

## HIGHLIGHTS INCLUDE:

- DOCSIS 1.1 and 2.0 Certified
- Integrated A-TDMA and S-CDMA technology can provide up to 30 Mbps upstream data rate
- WHQL certified USB drivers for Windows® 2000/Me/XP
- New stylish design saves valuable desk space
- Front panel status LEDs and built-in HTML-based diagnostics for quick and easy troubleshooting
- USB and Ethernet connectivity simplifies installation
- Compatible with Windows® 5/98/2000/Me/NT/XP, Mac®, Linux®, and UNIX®
- Supports up to 32 users (1 via USB and 31 via Ethernet or 32 users on Ethernet)
- No telephone lines needed – always on, always connected

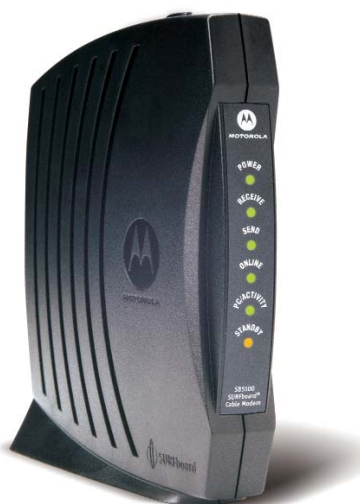

## GENERAL SPECIFICATIONS

Downstream	Upstream	General	Environmental
Modulation: 64 or 256 QAM	Modulation: 8***, 16, 32***, 64***, 128**** QAM or QPSK	Cable Interface: F-connector, female, 75	Operating Temperature: 0P to 40P C
Maximum Data Rate:* 38 Mbps	Maximum Data Rate:** 30 Mbps	CPE Network Interface: USB, Ethernet 10/100Base-T	Storage Temperature: -30P to 80P C
Bandwidth: 6 MHz	Bandwidth: 200 kHz, 400 kHz, 800 kHz, 1.6 MHz, 3.2 MHz, 6.4*** MHz	Data Protocol: TCP/IP	Operating Humidity: 0 to 95% R.H. (non-condensing)
Symbol Rate: 64 QAM	Symbol Rates: 160, 320, 640, 1280, 2560 and 5120*** ksym/s	Dimensions: 6.2" H 2.3"W 6.0"L	
Symbol Rate: 256 QAM		Power: 9 Watts (nominal)	
5.069 Msym/s		Input Power: North America: 105-125VAC, 60Hz International: 100-240VAC, 50-60Hz	
Operating Level Range: -15 to +15dBmV	Operating Level Range: A-TDMA: +8 to+54 dBmV (32QAM, 64QAM) +8 to+55 dBmV (8QAM, 16QAM) +8 to+58 dBmV (QPSK) S-CDMA: +8 to+53 dBmV (all modulations)		
Input Impedance: 75 (nominal)	Output Impedance: 75 (nominal)		
Frequency Range: 88 to 860 MHz	Frequency Range: 5 to 42 MHz (edge to edge)		

## FEATURES

- Integrated DOCSIS 2.0 A-TDMA and S-CDMA technology
- 10/100 Base-T Ethernet and USB connectivity
- Supports up to 32 users (1 via USB and up to 31 via Ethernet or 32 users on Ethernet)
- Ethernet and USB connections are bridged allowing LAN traffic between USB device and Ethernet LAN
- Remote management via SNMP
- Software upgradeable over the network
- Top-mounted stand-by button enhances network security to end-user
- Front panel LEDs and built-in HTML-based diagnostic user interface for easy troubleshooting
- Multi-language user guide
- Global safety approval and certificates:
  - CB scheme (EN60950/IEC950)
  - CE-Evaluation test report (EN55022/EN55024)
  - FCC Part 15
  - UL 1950

## CONCLUSION

The introduction of the Motorola SURFboard SB5100 Cable Modem further demonstrates Motorola's technological leadership, as well as its overall commitment to the cable industry. Equipped to meet DOCSIS 2.0 standards, the SB5100 is a next-generation cable modem that's ready to take advantage of tomorrow's advanced technologies — today. It's interoperable and backward compatible with existing DOCSIS 1.0 and 1.1 systems and allows for cost-efficient incremental system upgrades — and it's also user-friendly, convenient, flexible and simple to install. The Motorola SURFboard SB5100 is DOCSIS 2.0 based to ensure advanced service offerings, excellent performance, seamless functionality and exceptional value... now that's innovative technology.

\*Actual speeds vary, and are often less than the maximum possible. Upload and download speeds are affected by several factors including, but not limited to: network traffic and services offered by your cable operator or broadband service provider, computer equipment, type of server, number of connections to server, and availability of Internet router(s).

\*\*Actual speeds vary. Speeds of 30 Mbps are only attainable with A-TDMA or S-CDMA technology.

\*\*\*With A-TDMA or S-CDMA enabled CMTS.

\*\*\*With S-CDMA enabled CMTS.



Motorola, Inc.  
Broadband Communications Sector  
101 Tournament Drive  
Horsham, PA 19044  
1.800.523.6678  
[www.motorola.com/broadband](http://www.motorola.com/broadband)

MOTOROLA and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. All other product or service names are the property of their respective owners. Microsoft and Windows are registered trademarks of Microsoft Corp. Windows Me and Windows XP are trademarks of Microsoft Corp. DOCSIS is a registered trademark of Cable Laboratories, Inc. Mac is a registered trademark of Apple Computer, Inc. Linux is a registered trademark of Linus Torvalds. UNIX is a registered trademark of The Open Group in the United States and other countries. ©Motorola, Inc. 2004.  
xxxxxx-001  
5506-0804-5K